

CITY OF WINTER PARK

REFERENCE THE "WATER & WASTEWATER UTILITY STANDARDS, SPECIFICATIONS & DETAILS MANUAL" WATER & WASTEWATER UTILITY DEPARTMENT

DATE: January 2, 2008 STANDARD DETAIL PLUG VALVE & BOX-WASTEWATER DETAIL FOR VALVES >12' SCALE NTS

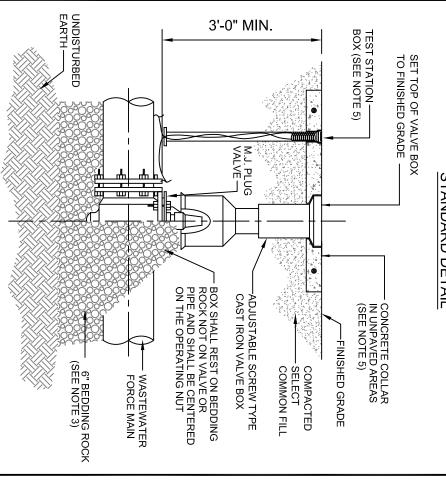

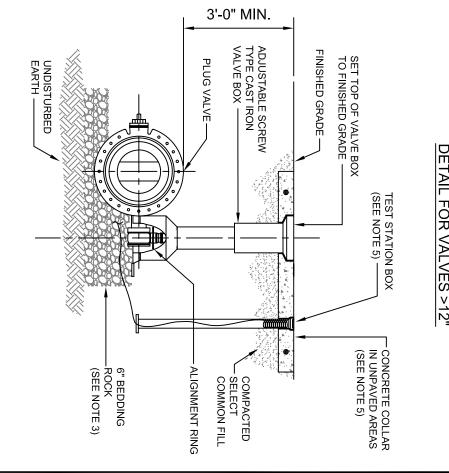

NOTES

- C900 PVC OR DUCTILE IRON PIPE EXTENSIONS SHALL BE USED ON VALVE BOX INSTALLATION.
- THE VALVE ACTUATING NUT SHALL BE EXTENDED TO BE WITHIN 3' OF FINISHED GRADE
- 3. BEDDING MATERIAL SHALL CONFORM TO FDOT NO. 57 AGGREGATE
- VALVE BOX SHALL REST ON BEDDING ROCK NOT ON VALVE OR PIPE AND SHALL BE CENTERED ON OPERATING NUT.
- SEE FIGURE 10 AND 42 FOR DETAILED SPECIFICATIONS.
- THE VALVE BOX COVER SHALL BE MARKED "SEWER"