


## TREE BARRICADE DETAIL

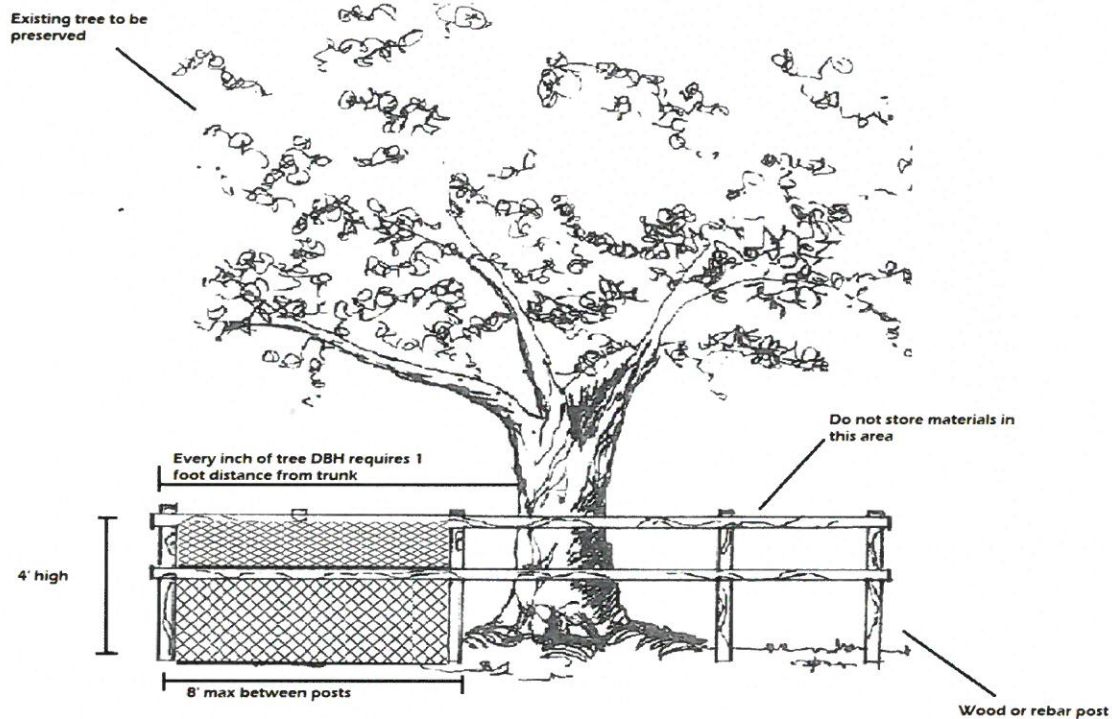

The tree protection barricade shall be at least four (4) feet high and consist of either wood fence with 2x4 posts placed a maximum of eight (8) feet apart with 2x4 top rails or temporary orange fencing or other similar barrier that will limit access to the protected area.

The barricade shall be at least one foot in distance for each inch of trunk diameter. For trees less than 12" DBH, the minimum barricade shall be placed at least ten (10) feet away from the base of the tree.

Tree barricade approval: Obtain city approval of tree barricades before beginning any clearing operations or site development.

Tree protection signs shall be posted



## TREE PROTECTION REQUIREMENTS

- Tree protection barrier required (subject and adjacent properties). Preferred material: 2x4 wood frames with high-vis fencing attached.
- Tree protection barrier shall be maintained at all times.
- No vehicles, machinery, soil deposits, building material etc. within tree protection zone.
- No mechanical, grubbing, trenching or clearing with in the tree protection zone.
- No wires, braces, nails, bolts, chains, or rope is to be attached to the tree.
- Grade changes of more than 3" require a dry well around the base of the tree encompassing the drip line.
- Removal of more than 3" of soil within the drip line is prohibited.
- Utilities are to be routed around the drip line, if not possible tunneling is required. TRENCHING IS PROHIBITED.
- When installing privacy walls or other permanent structures, carrier beams should be installed to bridge over the roots.
- Tree protection signs shall be posted