

CITY OF WINTER PARK


WATER & WASTEWATER UTILITY DEPARTMENT

REFERENCE THE "WATER & WASTEWATER UTILITY STANDARDS, SPECIFICATIONS & DETAILS MANUAL"

DATE: January 2, 2008

FIRE HYDRANT ASSEMBLY

SCALE: N.T.S

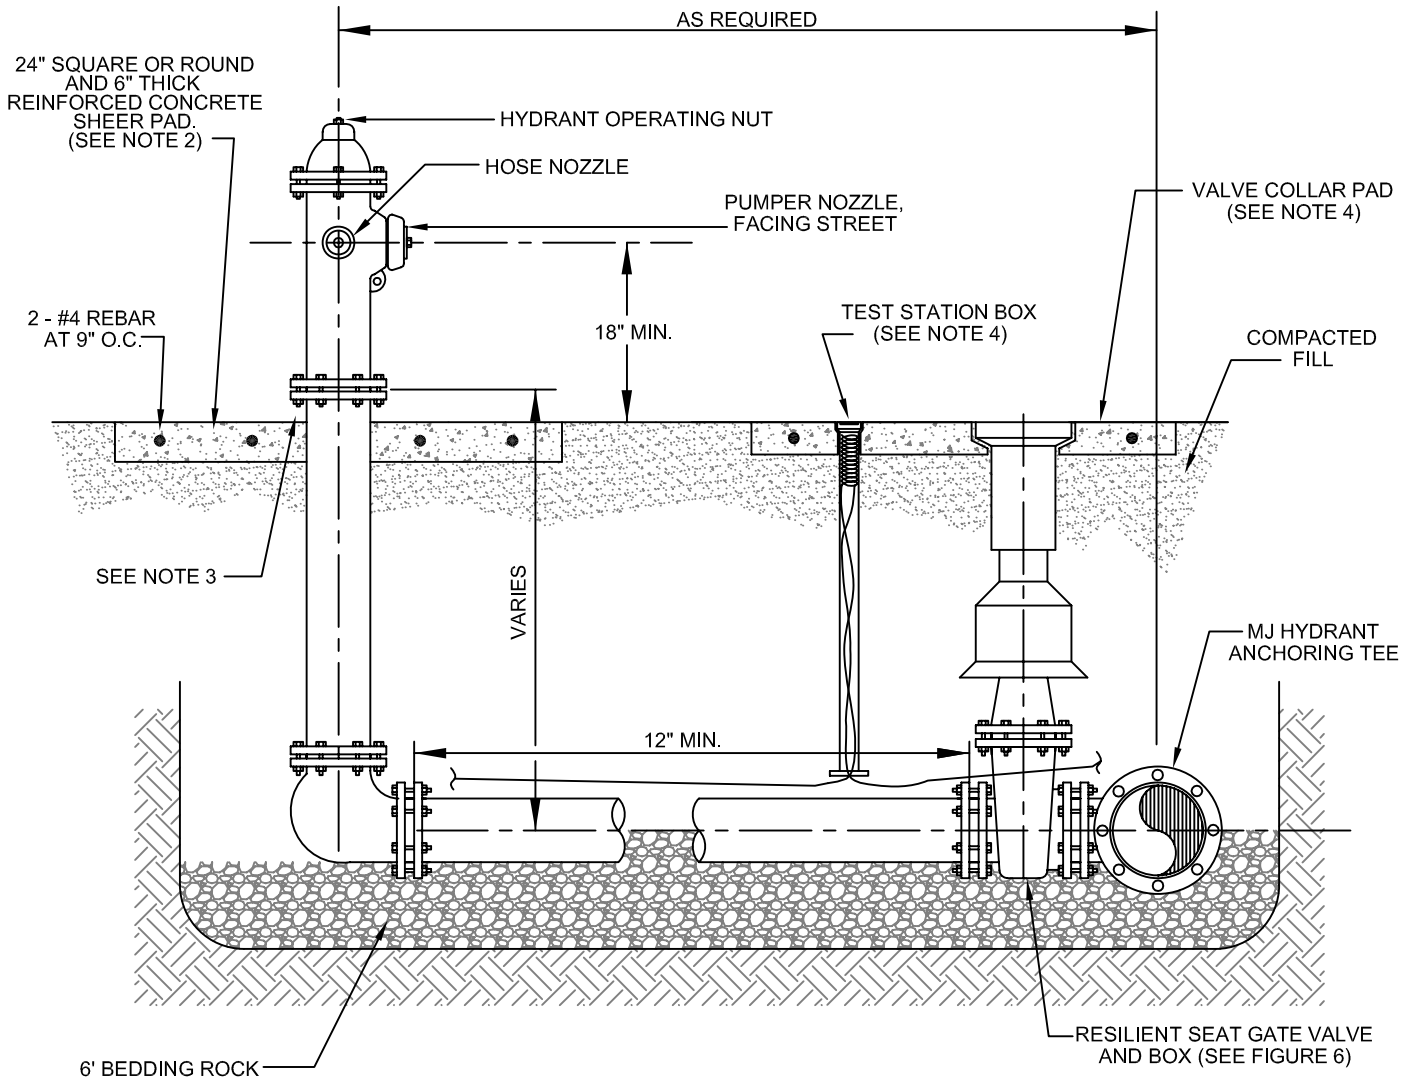

NOTES:

1. FIRE HYDRANT SHALL BE SUPPLIED WITHOUT A WEEP HOLE, OR WITH A PERMANENTLY PLUGGED WEEP HOLE.
2. CLEARANCE BETWEEN BOTTOM OF BOLTS AND TOP OF SHEAR PAD SHALL BE 6" MINIMUM.
3. CLOW, KENNEDY OR MUELLER HYDRANTS, ONLY.
4. SEE FIGURE 10 AND 42 FOR DETAILED SPECIFICATIONS.

FIGURE 18