

**CITY OF WINTER PARK**


**WATER & WASTEWATER UTILITY DEPARTMENT**

REFERENCE THE "WATER & WASTEWATER UTILITY STANDARDS, SPECIFICATIONS & DETAILS MANUAL"

DATE: January 2, 2008

**CLEANOUT-WASTEWATER**

SCALE: N.T.S

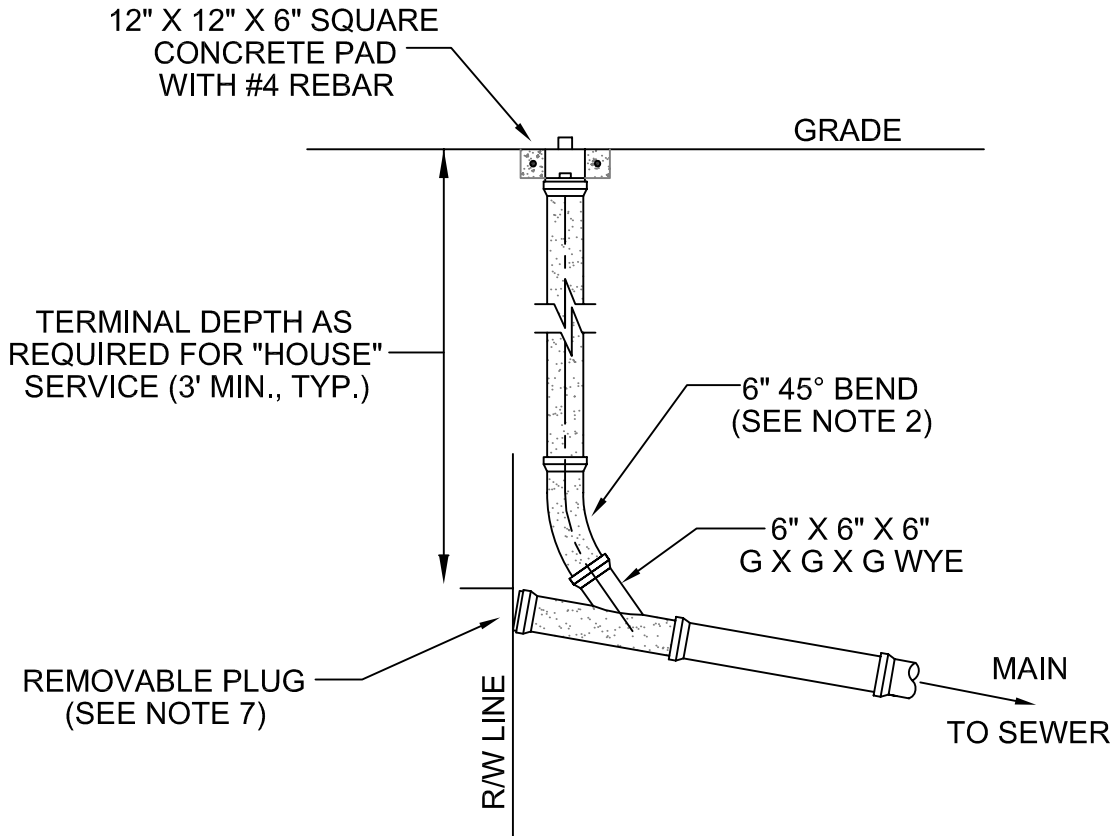

**NOTES:**

1. SERVICE LATERAL SHALL BE CAPPED BY DEVELOPER'S CONTRACTOR.
2. ALL FITTINGS SHOWN ARE TO BE INSTALLED.
3. SERVICE CONNECTIONS SHALL BE PERMANENTLY MARKED BY CUTTING AN "S" INTO THE CURB DIRECTLY OVER THE LATERAL.
4. BUILDER'S PLUMBER WILL REMOVE PLUG, INSTALL CLEANOUT AND CONNECT LATERAL TO HOUSE.
5. 6" CLEANOUT (SHOWN SHADED) SHALL BE INSTALLED BY THE BUILDER AND/OR CONTRACTOR AT THE PROPERTY LINE IN ACCORDANCE WITH UTILITY STANDARDS.
6. SINGLE LATERALS ARE TO BE INSTALLED PER CITY UTILITY REQUIREMENTS.
7. HOUSE LATERAL SHALL BE CONNECTED TO THE 6" X 6" X 6" WYE. CONNECTION TO THE VERTICAL CLEANOUT STACK SHALL NOT BE ALLOWED.

**FIGURE 43**